


- Features
- 30A carrying current
 - SPST-NO& SPDT
 - PCB & PC terminals



JQX-30F (T91)

PCB Relay

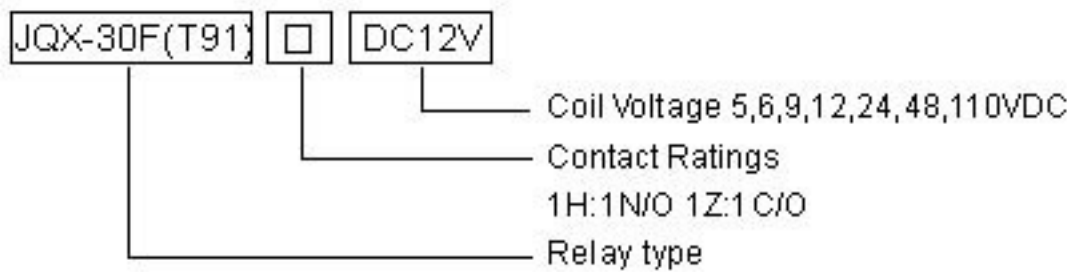

Contact Ratings

Contact Ratings	1H	1D	1Z	
Contact Resistance	50m (at 1A 6VDC)			
Contact Material	Silver Alloy			
Contact capacity	7200VA/	3600VA/	4800VA/	2400VA/
	560W	280W	560W	280W

Specification

InsulationResistance	1000M .500VDC
Dielectric Strength	BCC 2500V 1 min
	BOC 1500V 1 min
Operate Time	15ms/10ms
Terminal Type	PCB


Coil Ratings

Nominal CoilPower	0.9W
-------------------	------

Coil Versions

Nominal Voltage VDC	Coil Resistance at 20°C±10 %	Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicable Voltage (VDC)
	0.9W			
5	27	3.75	0.5	6.5
6	40	4.50	0.6	7.8
9	97	6.75	0.9	11.7
12	155	9.00	1.2	15.6
24	660	18.00	2.4	31.2
48	2560	36.00	4.8	62.4
110	13450	82.50	11.0	143.0

Dimension.Bottom View

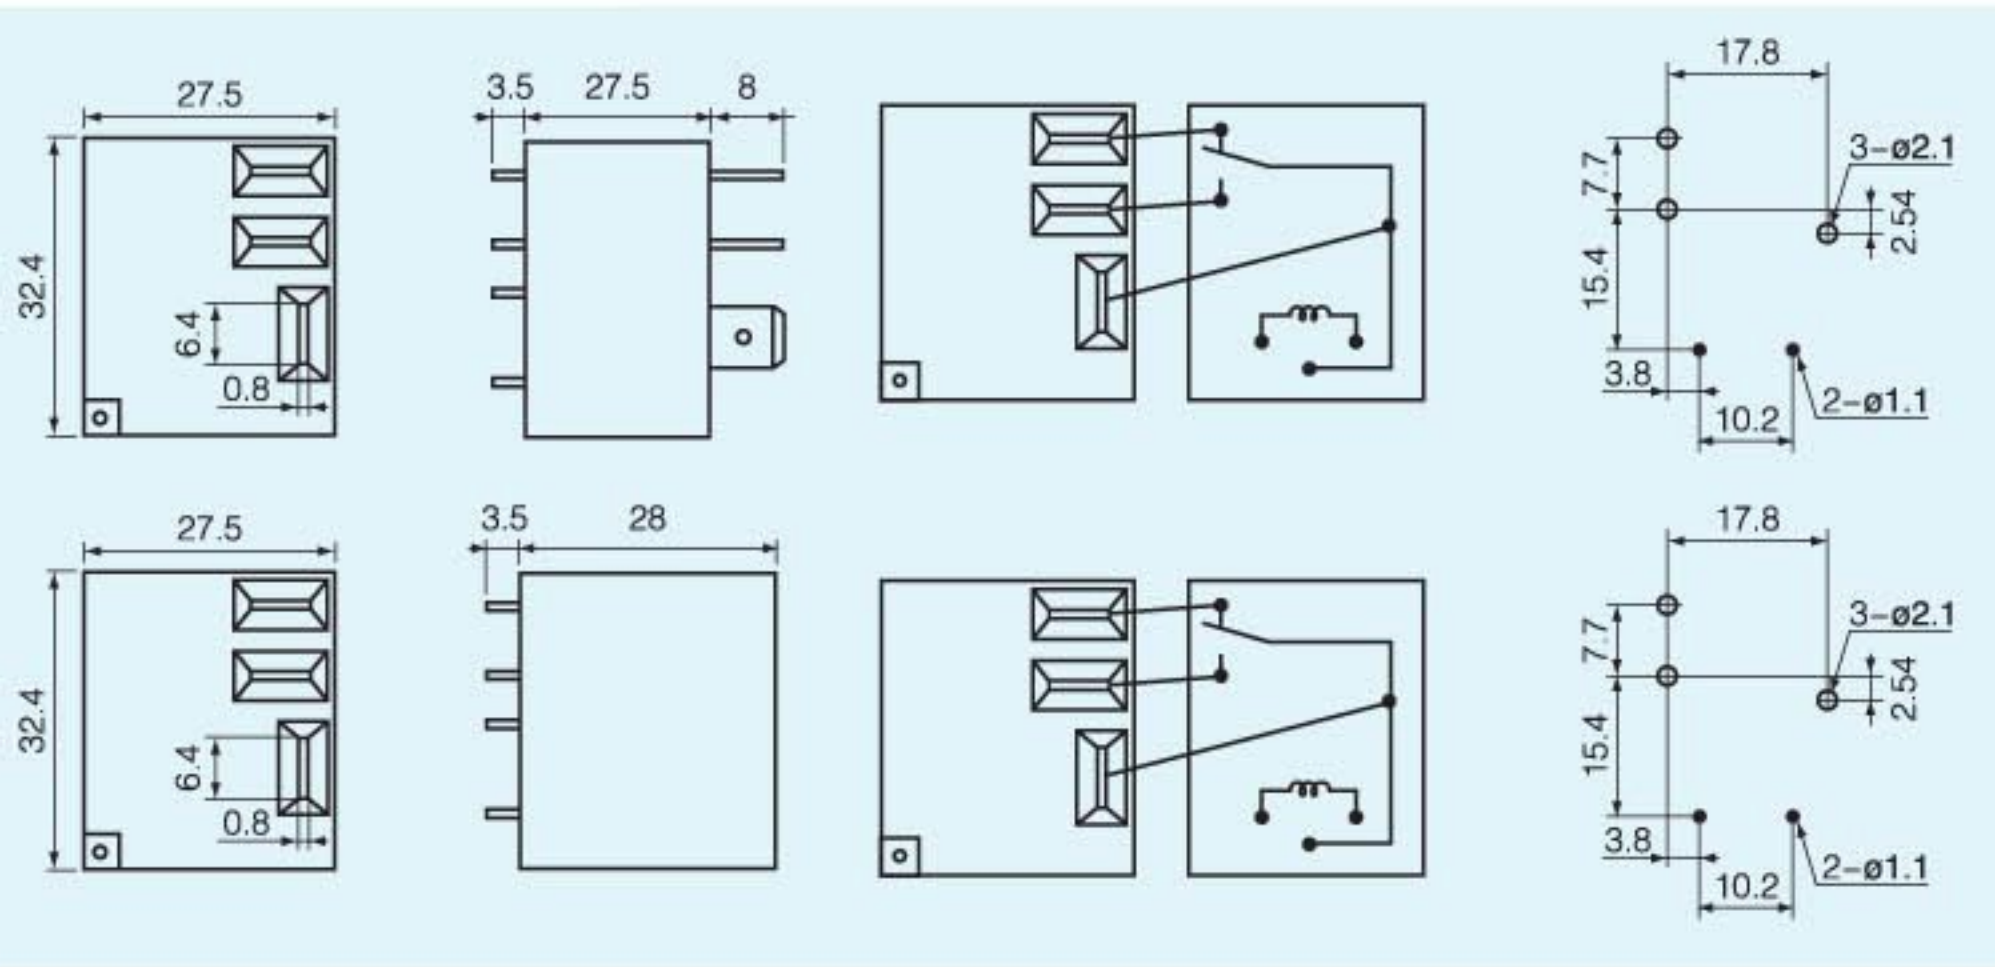

Reference Data

